

2 KOMPONENTEN MASCHINENBAU

MIX- AND METERING SYSTEMS



SilcoStar 902E

Hydraulic driven Metering system for processing LSR



Technical Data


Viscosity	< 1.000.000 mPas
Output mixed material	800g/min (depending on viscosity)
Mixing Ratio	1:1
Colour Metering	0.3 – 4%

Consumption / Connections

Actuation	hydraulic
Electrical Data	180 – 470VAC / 50 – 60 Hz, 3P+PE, 10 A

Connection

LIM Machine	24V
Pneumatic System	R1/4", 6bar, low
Weight	appr. 450kg
Dimensions	(757 x 860 x 2.100) mm [W x D x H]

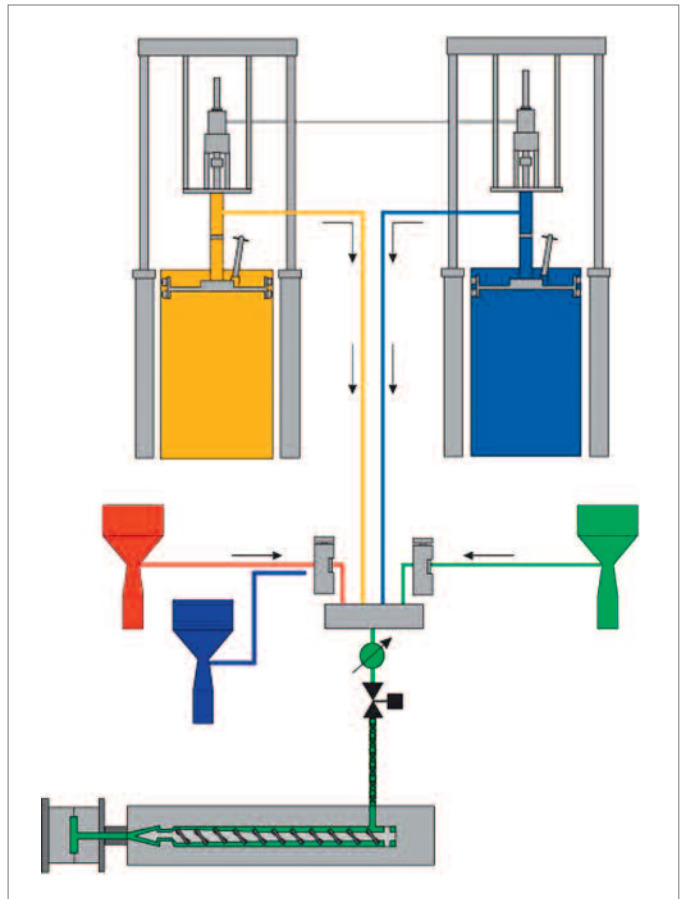

Options

- Colour- metering
- Proportional colour metering
- Cooled mixing unit
- Interchanging supply of two LIM machines
- Movable version (on wheels)
- Varnishing in special colours



10 l colour supply pump



Proportional colour metering



Cooled mixing unit



colour metering
with metering
valve and position
indicator