



2 KOMPONENTEN MASCHINENBAU
MIX- AND METERING SYSTEMS



SilcoStar 922E
Hydraulic driven Metering system for processing LSR





Proportional colour metering




Movable version



Cooled mixing unit

Options

- Colour- metering
- Proportional colour metering
- Cooled mixing unit
- Interchanging supply of two LIM machines
- Movable version (on wheels)
- Varnishing in special colours

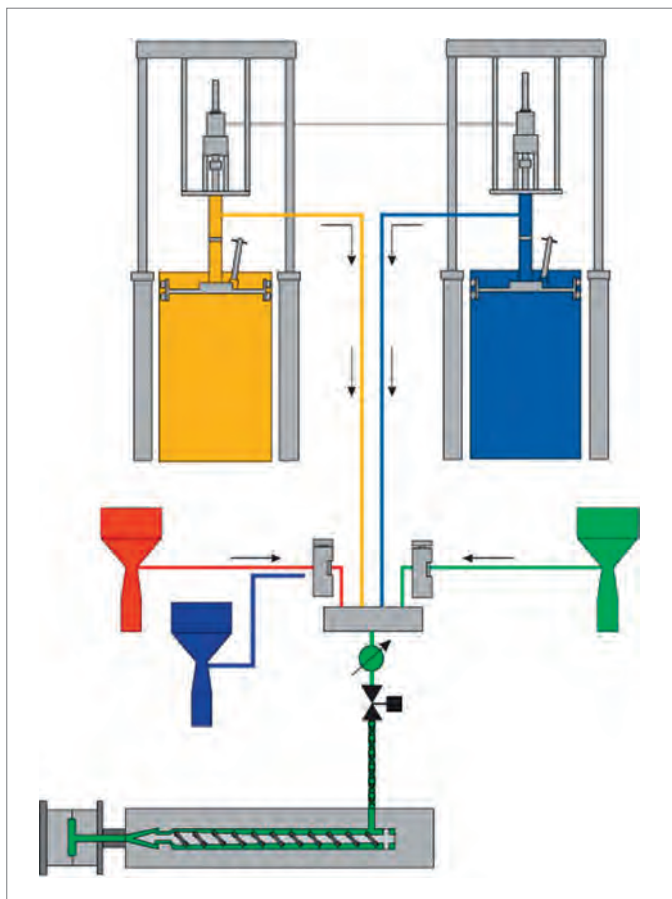

Moveable 20 l colour supply pump with agitator



10 l colour supply pump



colour metering with metering valve and position indicator



Technical Data

922EA (200l + 20l barrel/pail)

Viscosity	1.000.000 mPas
Output mixed material	800g/min (depending on viscosity)
Mixing Ratio	1:1
Colour Metering	0,3 – 4%

Consumption / Connections

Actuation	hydraulic
Electrical Data	175 – 275VAC / 300 – 480VAC, max. 10A
Connection	
LIM Machine	24V-
Pneumatic System	R1/4", 6bar, low
Weight	730 kg
Dimensions	1.030x1.112x1.950 mm [WxHxD]